




Indicator Post | Vertical | IPV-1



| SPECIFICATIONS | |
|---------------------|---|
| Application | Operate hidden or buried post indicator or NRS Valves |
| Compatibility | NRFL-4 or NRGL-4 models only |
| Valve Sizes | 4"/DN100 to 12"/DN300 |
| Indicator Positions | 'OPEN' & 'SHUT' |
| Adjustment Range | 570mm to 1,500mm |
| Finish | Epoxy resin coated |
| Conformity | UL 789, ULC / ORD-C789 & FM 1000 |
| Approvals | UL, C-UL, FM |

Materials list

| Item | Part | Qty | Material | Specification |
|------|----------------------|-----|---------------------|---------------|
| 1 | Handwheel | 1 | Ductile Iron | ASTM A536 |
| 2 | Driving Rod | 1 | Stainless Steel 304 | ASTM A276 |
| 3 | Indicator Cover | 1 | Cast Iron | ASTM A126 |
| 4 | Pin | 1 | Steel 1035 | ASTM A29 |
| 5 | Driving Nut | 1 | Stainless Steel 304 | ASTM A276 |
| 6 | Bolt | 4 | Steel 1035 | ASTM A29 |
| 7 | Screw Plug | 1 | Steel 1035 | ASTM A29 |
| 8 | Connecting Rod | 1 | Steel 1045 | ASTM A29 |
| 9 | Connecting Rod | 1 | Steel 1045 | ASTM A29 |
| 10 | Extension Rod | 1 | A283 Gr. C | ASTM A36 |
| 11 | Flange | 1 | Cast Iron | ASTM A126 |
| 12 | Connecting Rod | 1 | Steel 1045 | ASTM A29 |
| 13 | Connecting Rod | 1 | Steel 1045 | ASTM A29 |
| 14 | Bolt | 1 | Steel 1035 | ASTM A29 |
| 15 | Bolt | 2 | Steel 1035 | ASTM A29 |
| 16 | Bolt | 2 | Steel 1035 | ASTM A29 |
| 17 | Indicator Plate | 4 | A413.0 | ASTM S12A |
| 18 | Keyhole Plate | 2 | A283 Gr. C | ASTM A36 |
| 19 | Keyhole Plate Gasket | 2 | EPDM | ASTM D2000 |
| 20 | Indicator Flap | 2 | Organic glass | |
| 21 | Housing | 1 | Cast Iron | ASTM A126 |
| 22 | Bolt | 2 | Steel 1035 | ASTM A29 |

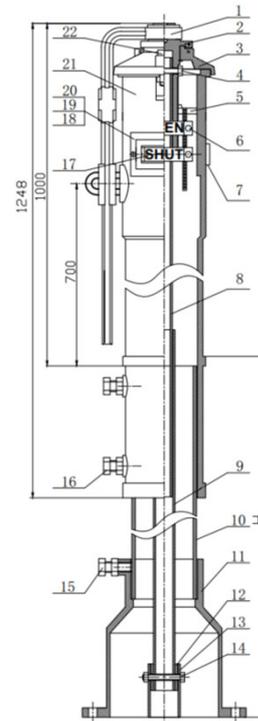

Operation

1. Ensure that the gate valve is closed.
2. Measure off the length of the connecting rod according to the depth of the gate valve
3. Cut off the excess length.
4. Install the post indicator to the wall.
5. Connect the post indicator to the gate valve.
6. Adjust the indicator to the 'SHUT' position.

Note: This document contains basic product information only. For more information, contact your local VIKING Sales Representative. Certificates, test reports and approvals may be published in the OEM name. The contents of this publication are subject to change without prior notice. All rights reserved. Images are purely for illustration only. Fireking™ is a trademark of The Viking Corporation.

Trusted above all.

The Viking Corporation (far East) Pte. Ltd. | 69 Tuas View Square, Westlink Techpark, Singapore 637621 | vikingapac@vikingcorp.com

