




SPECIFICATIONS	
Contact Ratings	Two SPDT (Form C) 15 Amps at 125/250VAC, 2.5 Amps at 0-30VDC Resistive
Factory Setting	5-7 psi / 0.34-0.48 bar
Differential Pressure	1 psi / 0.07 bar
Maximum Working Pressure	250psi
Enclosure	IP66
Working Temperature	-40 to 60°C / -40 to 140°F
Outer Cover	Die Cast (Coated Red)
Base Plate	Galvanised Carbon Steel
Approvals	UL, FM

Materials list

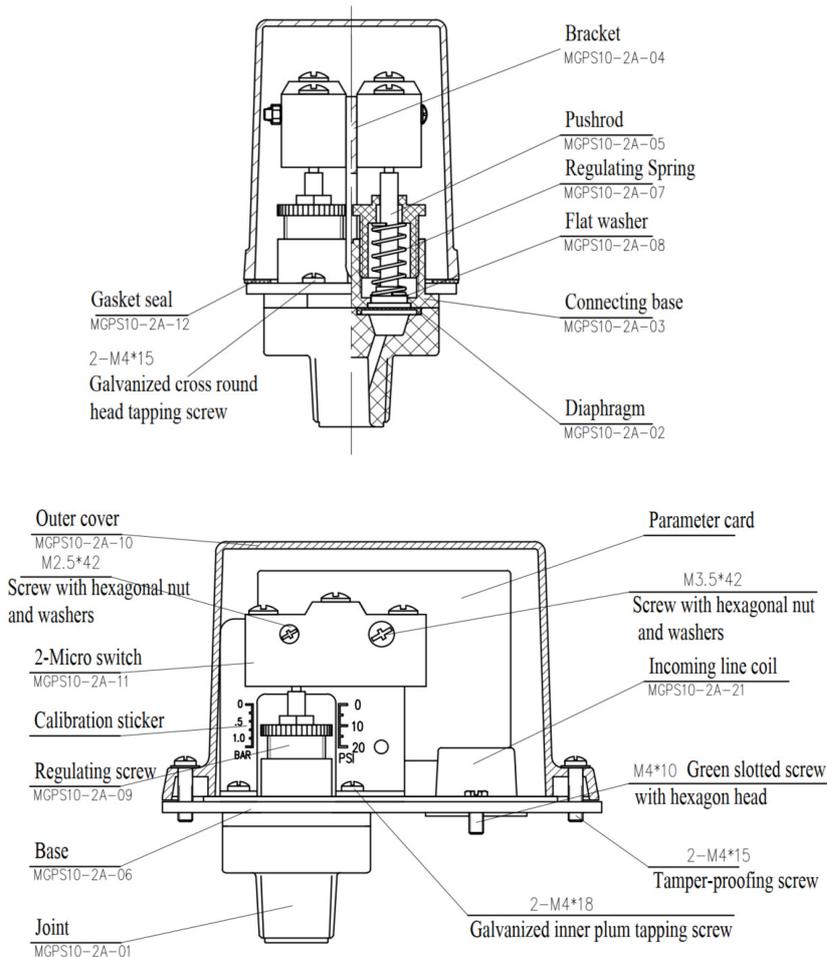

**Note:** This document contains basic product information only. For more information, contact your local VIKING Sales Representative. Certificates, test reports and approvals may be published in the OEM name. The contents of this publication are subject to change without prior notice. All rights reserved. Images are purely for illustration only. Fireking™ is a trademark of The Viking Corporation.

Trusted above all.

The Viking Corporation (far East) Pte. Ltd. | 69 Tuas View Square, Westlink Techpark, Singapore 637621 | vikingapac@vikingcorp.com

